



# راهنمای تنظیمات مودم TP-Link TD-W8968N



راهنمای تنظیمات مودم TP-Link TD-W8968N

تاریخ تنظیم: بهار ۱۳۹۹

گروه فناوری اطلاعات و ارتباطات شاتل

فهرست مطالب

تنظیمات مودم برای اتصال به اینترنت از طریق Quick Setup

تنظیمات وایرلس

MAC Filter

تنظیمات مودم برای اتصال به اینترنت از طریق **Quick Setup** برای انجام تنظیمات مودم برای اتصال به اینترنت گزینه **Quick Setup** را انتخاب کنید. و گزینه **Next** را انتخاب کنید.




شکل ۱

در این مرحله گزینه ADSL انتخاب شود و **Next** کنید.



شکل ۲

مرحله بعدی ، تنظیمات به صورتی که در شکل نمایش داده شده است باید انجام شود.

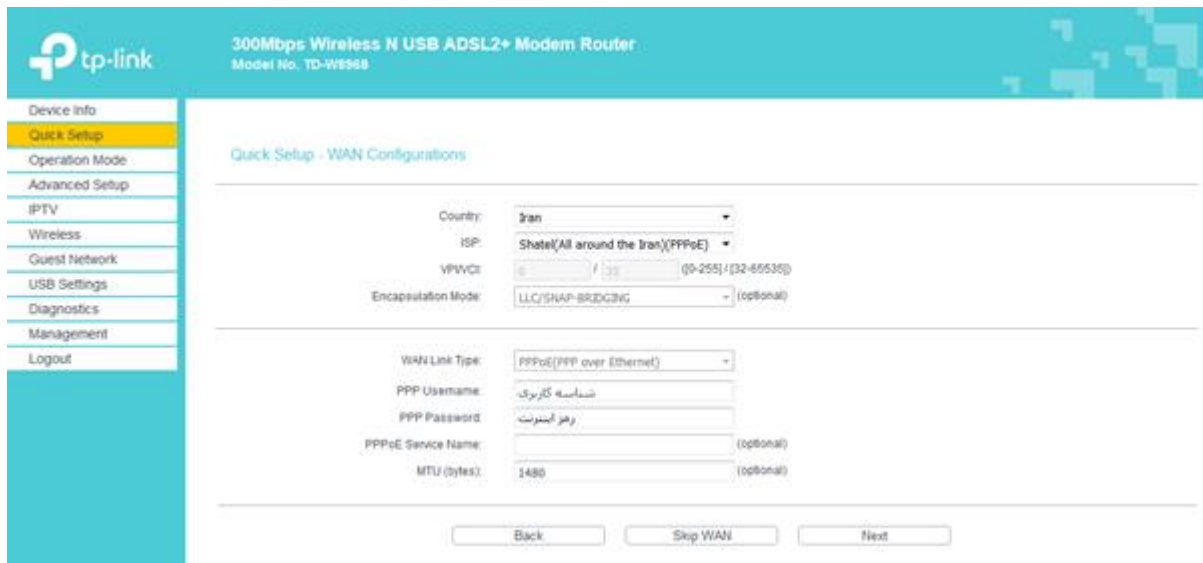


The screenshot shows the 'Quick Setup - WAN Configurations' page for a TP-Link TD-W8968N modem. The left sidebar contains navigation options: Device Info, Quick Setup (highlighted), Operation Mode, Advanced Setup, IPTV, Wireless, Guest Network, USB Settings, Diagnostics, Management, and Logout. The main content area includes the following fields:

- Country: Iran
- ISP: Shatel(All around the Iran)(PPPoE)
- VPI/VCI: 8 / 35 (00-255) / (32-65535)
- Encapsulation Mode: LLC/SHAP-BRIDGING (optional)
- WAN Link Type: PPPoE(PPP over Ethernet)
- PPP Username: شناسه کاربری
- PPP Password: رمز اینترنت
- PPPoE Service Name: (optional)
- MTU (bytes): 1480 (optional)

At the bottom, there are three buttons: Back, Skip WAN, and Next.

شکل ۳

در مرحله بعدی، تنظیمات وایرلس را مشابه زیر را انجام دهید. و سپس Next کنید.

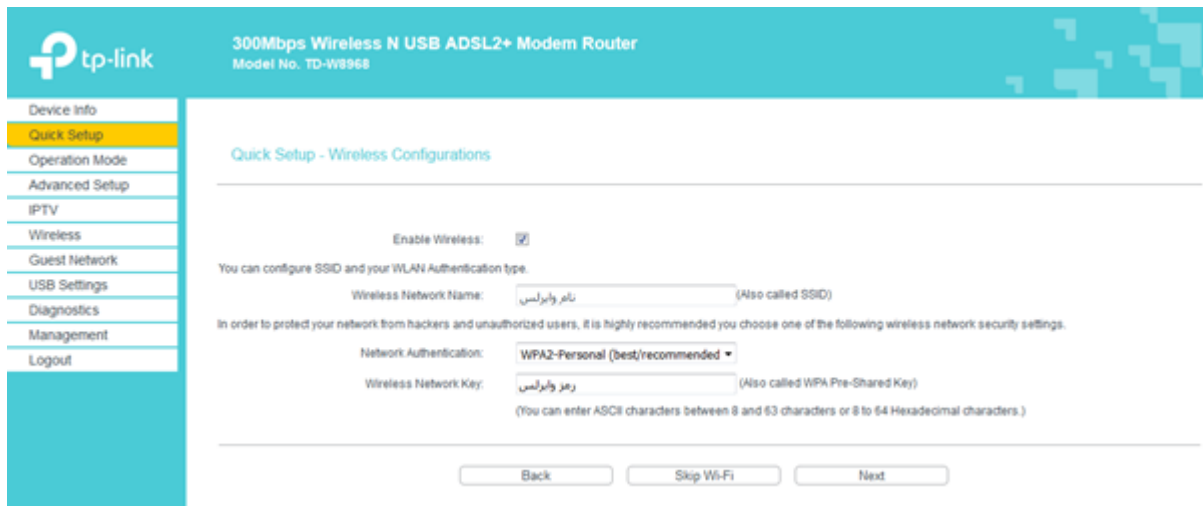


The screenshot shows the 'Quick Setup - Wireless Configurations' page for a TP-Link TD-W8968N modem. The left sidebar is the same as in the previous screenshot. The main content area includes the following fields:

- Enable Wireless:
- You can configure SSID and your WLAN Authentication type.
- Wireless Network Name: نام وایرلس (Also called SSID)
- In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.
- Network Authentication: WPA2-Personal (best/recommended)
- Wireless Network Key: رمز وایرلس (Also called WPA Pre-Shared Key)
- (You can enter ASCII characters between 8 and 63 characters or 8 to 64 Hexadecimal characters.)

At the bottom, there are three buttons: Back, Skip Wi-Fi, and Next.

شکل ۴

و در انتها بر روی گزینه Confirm کلیک کنید.

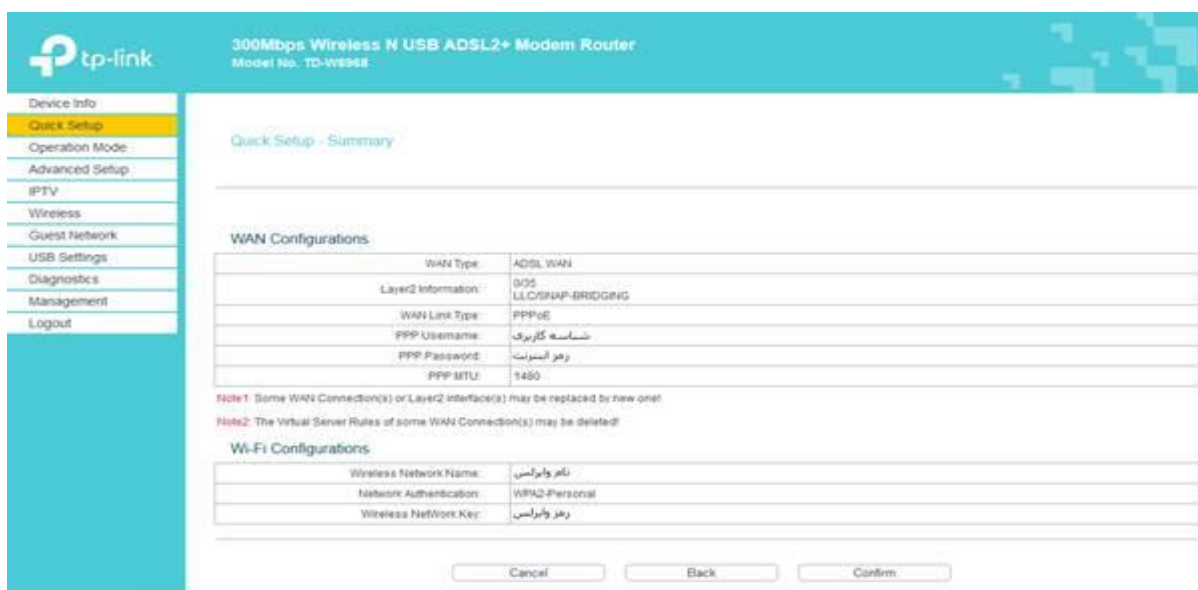

300Mbps Wireless N USB ADSL2+ Modem Router  
Model No. TD-W8968

Quick Setup - Summary

WAN Configurations

WAN Type:	ADSL WAN
Layer2 Information:	DOS LLC/SNAP-BRIDGING
WAN Link Type:	PPPoE
PPP Username:	شماره کاربری
PPP Password:	رمز اینترنت
PPP MTU:	1480

Note1: Some WAN Connection(s) or Layer2 Interface(s) may be replaced by new one!  
Note2: The Virtual Server Rules of some WAN Connection(s) may be deleted!

Wi-Fi Configurations

Wireless Network Name:	نام وایرلس
Network Authentication:	WPA2 Personal
Wireless Network Key:	رمز وایرلس


Cancel Back Confirm

شکل ۵

تنظیمات وایرلس

ابتدا از قسمت Wireless گزینه Basic Setting را انتخاب کنید.

در صفحه باز شده در قسمت SSID نام وایرلس خود را وارد کنید. در این صفحه می توانید Channel وایرلس را نیز تغییر دهید.

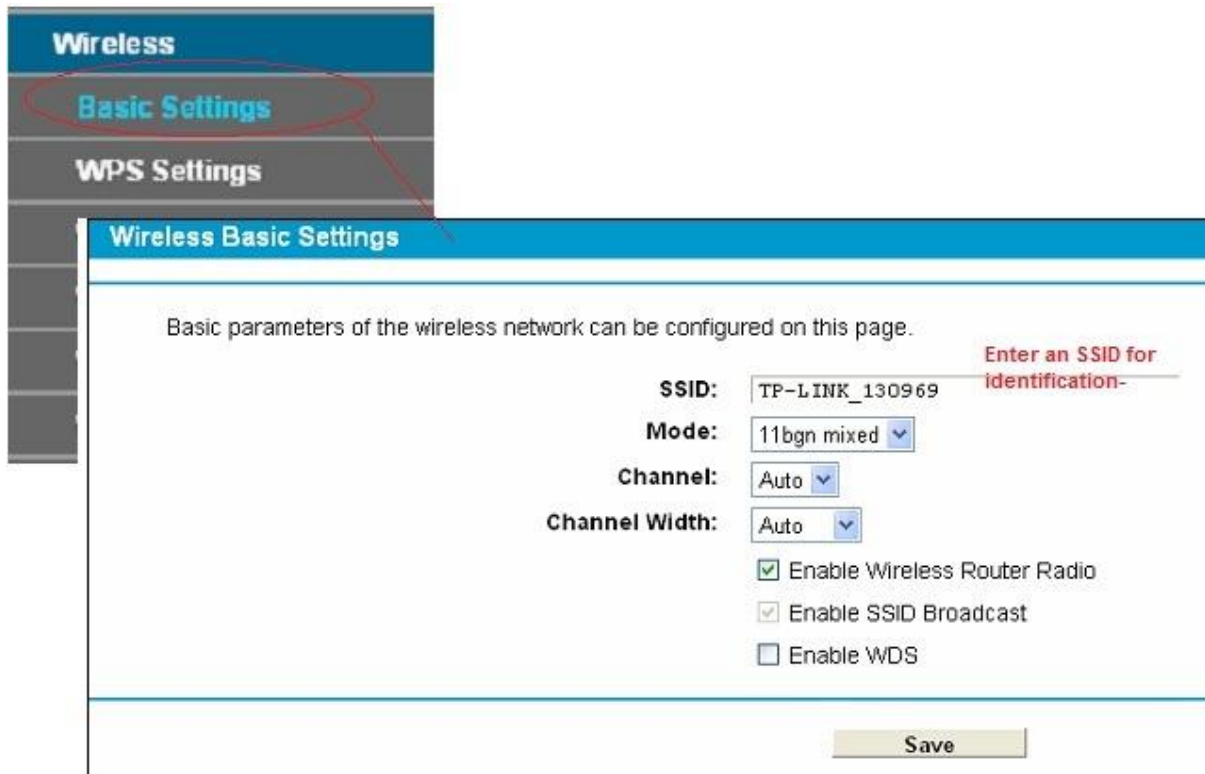

Wireless

Basic Settings

WPS Settings

Wireless Basic Settings

Basic parameters of the wireless network can be configured on this page.

Enter an SSID for identification-

SSID: TP-LINK\_130969

Mode: 11bgn mixed

Channel: Auto

Channel Width: Auto

Enable Wireless Router Radio

Enable SSID Broadcast

Enable WDS


Save

شکل ۶

در قسمت Security نیز ، در حالت WPA2 PSK پسورد وایرلس خود را مشخص کنید.

## MAC Filtering

این قابلیت برای این استفاده می شود که بتوان اجازه دسترسی و یا عدم دسترسی برای تعدادی از سیستم‌ها ایجاد کرد. برای فعال‌سازی این قابلیت از منو Wireless صفحه گزینه Wireless MAC Filter را انتخاب کنید. گزینه را بر روی Enable قرار دهید بعد از انجام این کار با توجه به مقصود خود از MAC Filtering گزینه Action را بر روی حالت Allow یا Deny قرار دهید و در قسمت های #Mac Address ، مک آدرس دستگاه‌ها را وارد کنید. در صورت انتخاب گزینه Deny لیست MAC های درج شده در جدول اجازه دسترسی به شبکه وایرلس را ندارند و در صورت انتخاب گزینه Allow فقط MAC های درج شده در جدول اجازه دسترسی به شبکه وایرلس را دارند.

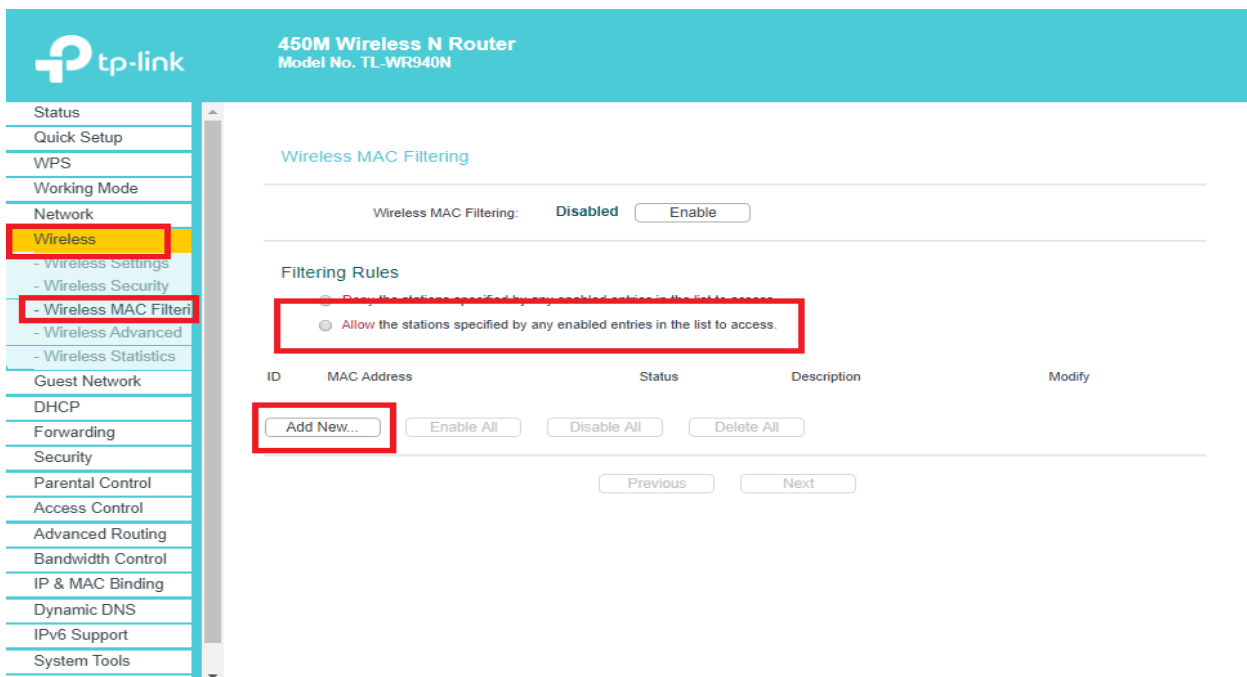

شکل ۷